

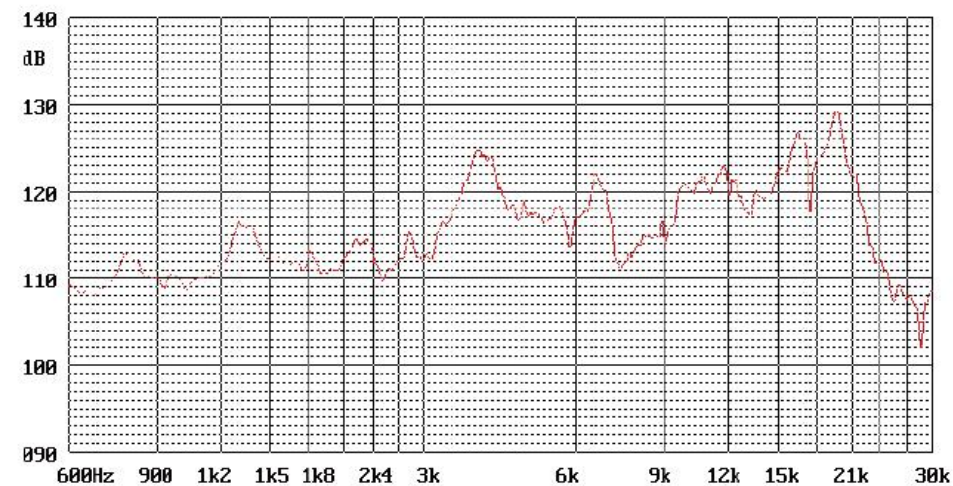
Product Code:

LDG30

RoHS
Compliant**Picture:****Specification:**

Rated Voltage	(Vp-p)	5.5
Operating Voltage	(Vp-p)	1~30
*Sound Output at 50cm	(dB)	≥90
Resonance Frequency	(KHz)	25.0±5.0
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	2.5
Cone		Mylar
RoHS		Yes

*Value applying at 5.5Vp-p, 25KHz sine wave

Test basic state: Temp($20 \pm 2^{\circ}\text{C}$) , Humidity(40~70%RH) , Air pressure(860~1060hPa).**Frequency Response:****Dimensions (Unit: mm)**Tolerance: $\pm 0.5\text{mm}$ Except Specified