

Product Code:

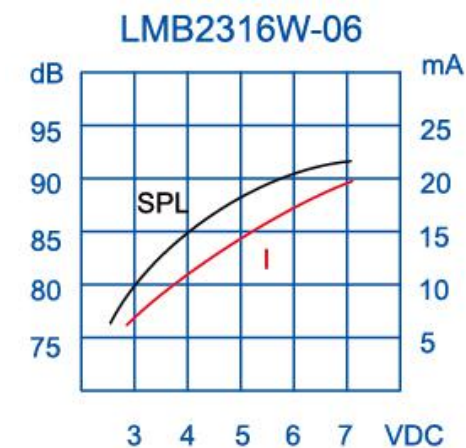
LMB2316W1303-06

**Picture:****Specification:**

Rated Voltage	(VDC)	6
Operating Voltage	(VDC)	3~7
*Rated Current	(mA)	≤35
*Sound Output at 10cm	(dB)	≥80
*Resonance Frequency	(KHz)	0.4±0.1
Operating Temperature	(°C)	-20~+60
Storage Temperature	(°C)	-30~+70
Weight	(g)	8.4
RoHS		Yes

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp($20 \pm 2^{\circ}\text{C}$) , Humidity(40~70%RH) , Air pressure(860~1060hPa).**SPL & Current Consumption vs. Input Voltage:****Dimensions (Unit: mm)**Tolerance: $\pm 0.5\text{mm}$ Except Specified