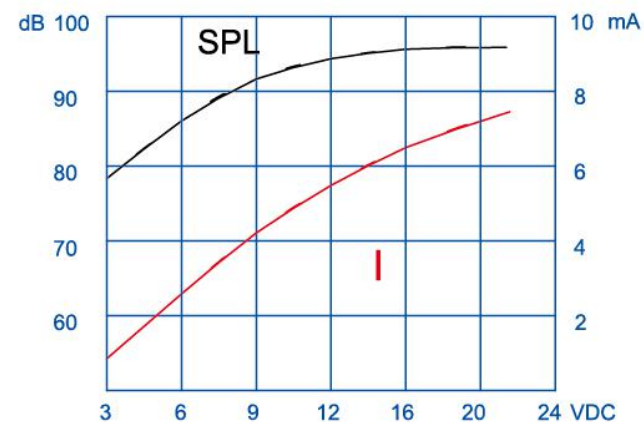


**Product Code:**

LPB2398-TB-12-3.5-15.0-R

**Picture:****SPL & Current Consumption vs. Input Voltage:****Specification:**

|                       |       |            |
|-----------------------|-------|------------|
| Rated Voltage         | (VDC) | 12         |
| Operating Voltage     | (VDC) | 3~20       |
| *Rated Current        | (mA)  | ≤12        |
| *Sound Output at 10cm | (dB)  | ≥90        |
| *Resonance Frequency  | (KHz) | 3.5±0.5    |
| Tone                  |       | Continuous |
| Operating Temperature | (°C)  | -40~+85    |
| Storage Temperature   | (°C)  | -40~+90    |
| Weight                | (g)   | 4.3        |
| Housing Material      |       | PBT        |
| RoHS                  |       | Yes        |

**Remark: The special requirements in the test for no anti reverse connection.**

\*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

