

Product Code:

LPB2418A-TB-12-2.8-15.0-R

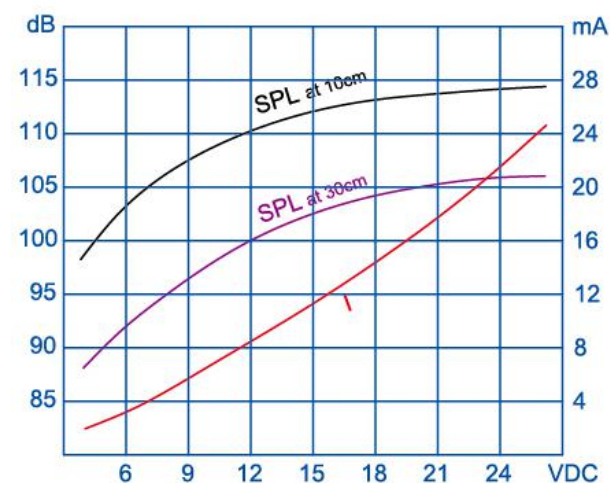
**Picture:****Specification:**

Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	3~20
*Rated Current	(mA)	≤15
*Sound Output at 10cm	(dB)	≥90
*Resonance Frequency	(KHz)	2.8±0.5
Tone		Continuous
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	4.8
Housing Material		PBT
RoHS		Yes

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

SPL & Current Consumption vs. Input Voltage:**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

