

Product Code:

LPB5029-TA-12-2.5-22.5-R

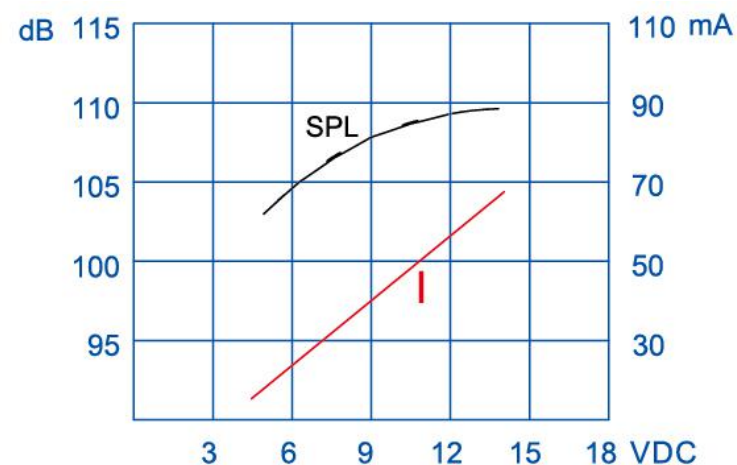
RoHS
Compliant**Picture:****Specification:**

Rated Voltage	(VDC)	12
Operating Voltage	(VDC)	5~13
*Rated Current	(mA)	≤75
*Sound Output at 25.4cm	(dB)	≥100
*Resonance Frequency	(KHz)	2.5±0.5
Tone		Continuous
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	26.7
Housing Material		ABS
RoHS		Yes

Remark: The special requirements in the test for no anti reverse connection.

*Value applying at rated voltage.

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

SPL & Current Consumption vs. Input Voltage:**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

