

Product Code:

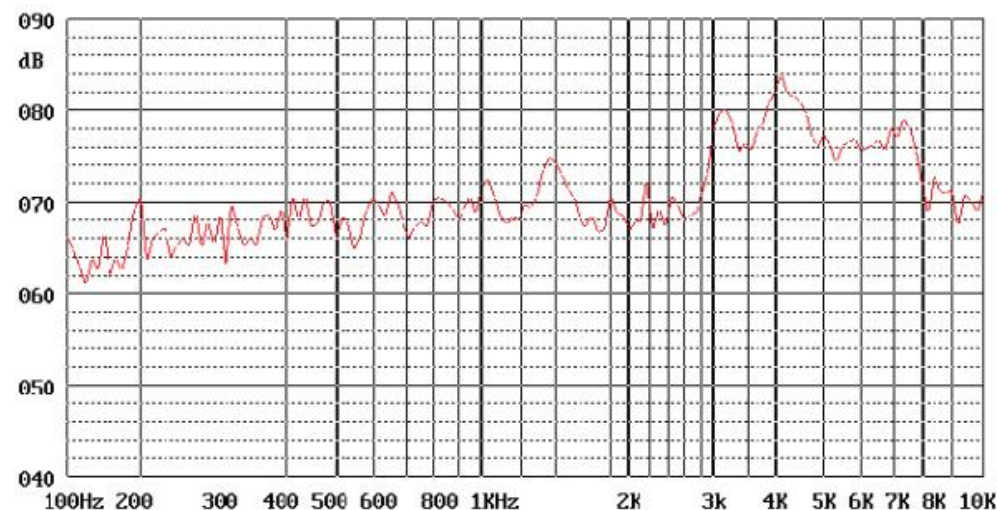
LPT1230S-HL-03-4.0-16-R

RoHS
Compliant**Picture:****Specification:**

Rated Voltage	(Vp-p)	3
Max Input Voltage	(Vp-p)	25
*Rated Current	(mA)	≤3
Capacitance at 100Hz	(pF)	16000±30%
*Sound Output at 10cm	(dB)	≥75
Resonance Frequency	(KHz)	4.0±0.5
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+85
Weight	(g)	0.4
Housing Material		LCP
RoHS		Yes

*Value applying at rated voltage , 4.0KHz, 1/2 duty , square wave

Test Basic State: Temp(20±2°C),Humidity(40~70%RH),Air pressure(860~1060hPa).

Frequency Response:**Dimensions (UNIT: mm)**

Tolerance: ±0.5mm Except Specified

