

Product Code:

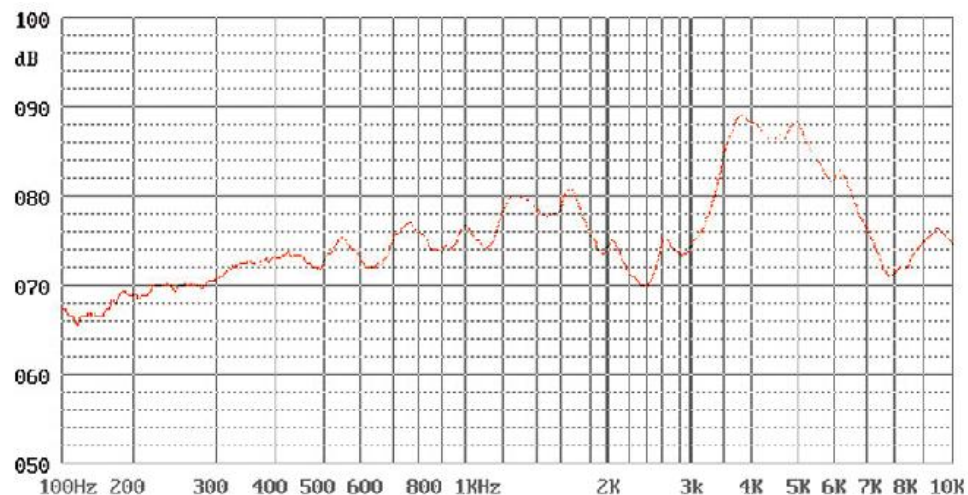
LPT1255-TO-09-4.0-12-6.5-R

**Picture:****Specification:**

Rated Voltage	(Vp-p)	9
Max Input Voltage	(Vp-p)	25
*Rated Current	(mA)	≤9
Capacitance at 100Hz	(pF)	12000±30%
*Sound Output at 10cm	(dB)	≥85
Resonance Frequency	(KHz)	4.0±0.5
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	0.5
Housing Material		PPO
RoHS		Yes

*Value applying at rated voltage , 4.0KHz, 1/2 duty , square wave

Test basic state: Temp(20±2℃) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

