

Product Code:

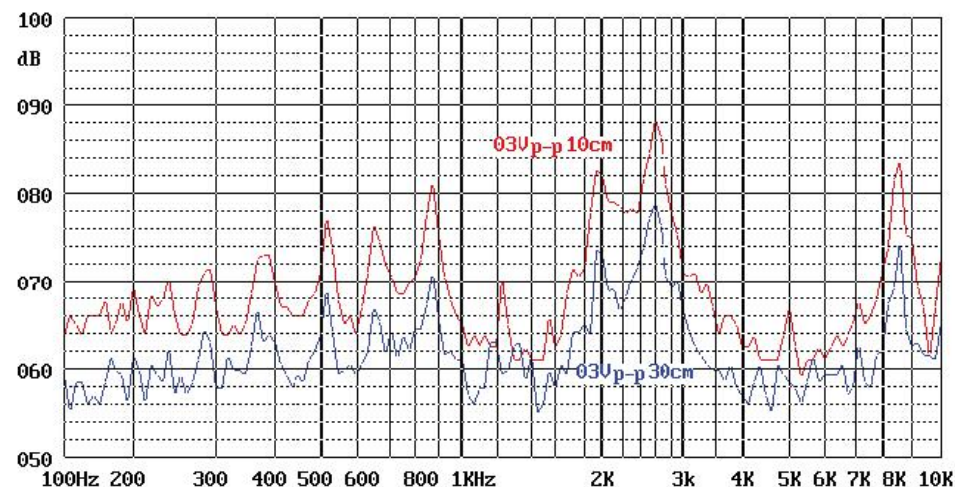
LPT2270D1-TB-03-2.0-20-12.5-R

**Picture:****Specification:**

Rated Voltage	(Vp-p)	3
Max Input Voltage	(Vp-p)	30
*Rated Current	(mA)	≤3
Capacitance at 100Hz	(pF)	20000±30%
*Sound Output at 10cm	(dB)	≥75
Resonance Frequency	(KHz)	2.0±0.5
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	2.5
Housing Material		PBT
RoHS		Yes

*Value applying at rated voltage , 2.0KHz, 1/2 duty , square wave

Test basic state: Temp($20 \pm 2^{\circ}\text{C}$) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:**Dimensions (Unit: mm)**

Tolerance: $\pm 0.5\text{mm}$ Except Specified

