

Product Code:

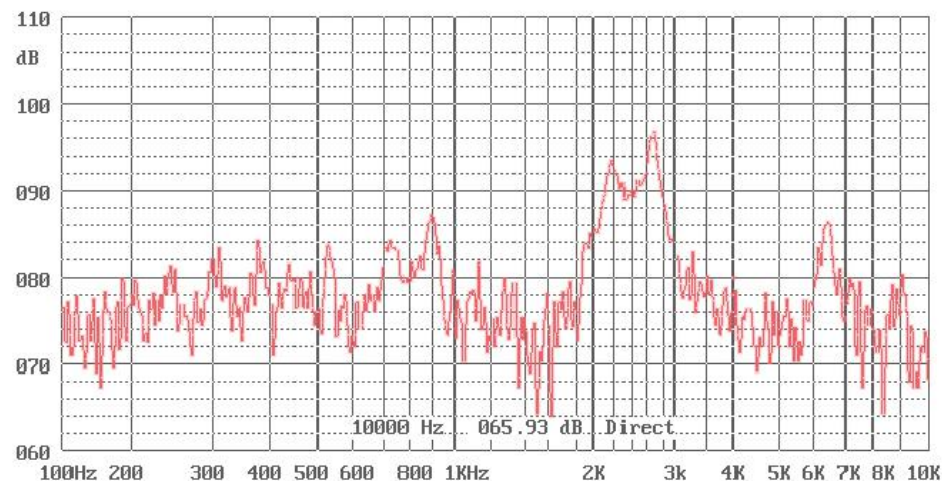
LPT3011A-TB-12-2.0-35-13.0-R

RoHS
Compliant**Picture:****Specification:**

Rated Voltage	(Vp-p)	12
Max Input Voltage	(Vp-p)	30
*Rated Current	(mA)	≤12
Capacitance at 100Hz	(pF)	35000±30%
*Sound Output at 10cm	(dB)	≥95
Resonance Frequency	(KHz)	2.0±0.5
Operating Temperature	(°C)	-40~+85
Storage Temperature	(°C)	-40~+90
Weight	(g)	4.8
Housing Material		PBT
RoHS		Yes

*Value applying at rated voltage , 2.0KHz, 1/2 duty , square wave

Test basic state: Temp(20±2℃) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:**Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

