

Product Code:

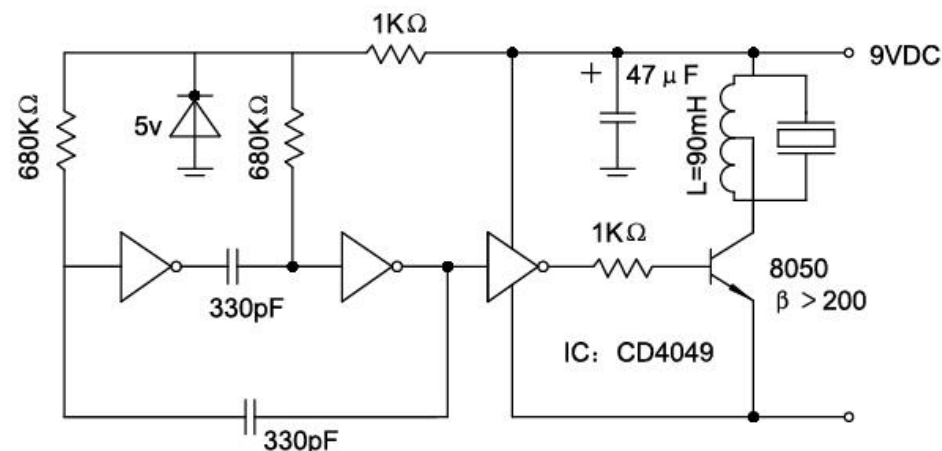
LPT3016W405-TA-09-3.4-R

RoHS
Compliant**Picture:****Specification:**

Rated Voltage	(Vp-p)	9
Max Input Voltage	(Vp-p)	28
*Rated Current	(mA)	≤18
Capacitance at 100Hz	(pF)	-
*Sound Output at 10cm	(dB)	≥95
Resonance Frequency	(KHz)	3.4±0.5
Operating Temperature	(°C)	-20~+70
Storage Temperature	(°C)	-30~+80
Weight	(g)	6.3
Housing Material		ABS
RoHS		Yes

*Value applying at rated voltage , 3.4KHz, 1/2 duty , square wave

Test basic state: Temp(20±2°C) , Humidity(40~70%RH) , Air pressure(860~1060hPa).

Frequency Response:**Self-Oscillation Circuit****Dimensions (Unit: mm)**

Tolerance: ±0.5mm Except Specified

